



TECHNICAL INFORMATION

Installation Guide

- The subfloor surfaces must be level, flat, clean, dry, smooth, and free of movement. All surface imperfections should be filled and sanded with a portland cement-based latex patching compound.
- Room temperature must be maintained at 18℃ or higer before and during installation.
- The flooring must be allowed to acclimate in the room to be installed for a minimum of 24 hours and be stacked flat on the floor to avoid bending the floor.
- Prior to installation, please ensure that both color and lot # are the same.

Maintenance

- Regularly sweep floor to remove sand and grit that can scratch floor.
- For best results, use only water with a mop. Avoid flooding the floor with too much water.
- For heavily soiled areas, use a neutral ph balanced floor cleaner.
- Use caution when lifting boxes.
- Promptly remove any standing water to avoid slippage.
- Keep Infiniti on the flat surface to keep it from warping.


Technical Data

DESCRIPTION	Standard	Craft	
Total thickness	EN 428	2.0mm	
Wear layer thickness	EN 429	0.2mm	
Total weight	EN 430	3450g/m^2	
Size	EN 427	600×600mm	457×457mm
		184x1220mm	457x914mm
CLASSIFICATION			
Classification	EN 685	23-31	
Fire rating	EN 13501-1	Bfl-s1	
Static electrical propensity	EN 1815	<2kV	
Slip resistance wet	DIN 51130	R10	
PERFORMANCES			
Wear resistance	EN 660-2	≤2.0mm^3	
Wear group	NF 189	Group T	
Impact sound reduction	EN ISO 717-2	5dB	
Residual indentation	EN 433	≤0.10mm	
Castor chair	EN 425	OK	
Thermal resistance	EN 12524	0.25W/(m.K)	
Colour fastness	EN 20 105-B02	≥6	
Surface treatment	---	PUR	
Chemical resistance	EN 423	Good	
CE MARKING			
CE MARKING CE	EN 14041		

Craft

Craft

LUXURY VINYL TILES

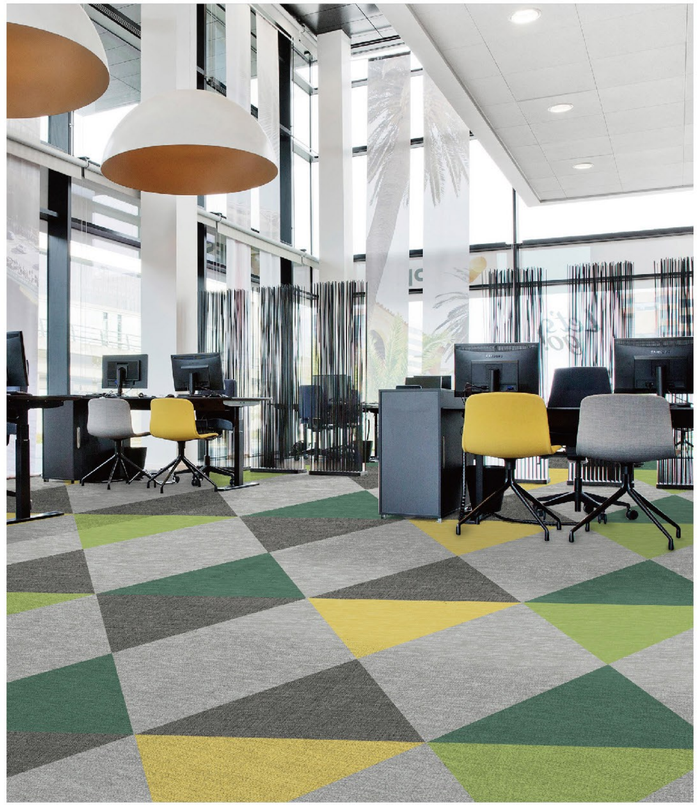

Topflor | The ultimate flooring
The ultimate performance


Craft

Triangle 600mm

Square 457×457 mm


Plank 184×1220 mm

Rectangle 457×914 mm

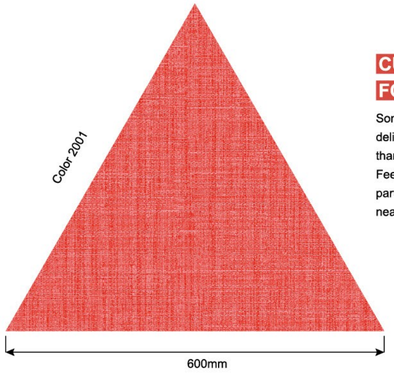

CUSTOMISATION FOR YOUR PROJECT

Sometimes, an interior project demands unique design to deliver that final touch making all the difference. We're more than happy to help you create that project specific flooring. Feel free to contact us with your idea and let us become a part of your creative process. The design possibilities are nearly endless.




Triangle



Rectangle



Square



Plank



2003



2007



2005



2009



2008




2004



2010



2002



2001



2006

Craft

Triangle 600mm

Square 457×457 mm

Plank 184×1220 mm

Rectangle 457×914 mm




2504



2501



2502



2505



2506



2601



2603



2602



2608



2607